



Yuasa Technical Data Sheet

Yuasa YBX9027 - YBX9000 AGM Start Stop Plus Batteries

Performance

| | |
|--------------------------|------|
| Voltage | 12V |
| Capacity (20-hour) | 60Ah |
| Cold Cranking Amps (EN1) | 640A |

Dimensions

| | |
|--------|-------|
| Length | 242mm |
| Width | 175mm |
| Height | 190mm |

Weights & Measures

| | |
|-----------------------|--------|
| Mean Weight with Acid | 17.7kg |
|-----------------------|--------|



Container Features

| | |
|------------------------|------------|
| Case Type | L2 DIN AGM |
| Hold Down | B3 |
| Handles | ✓ |
| End Venting | ✓ |
| Semi-Traction Features | ✓ |
| Lid Type | VRLA |

Technology

| | |
|---------------------------|-------------|
| Flame Arrestor Technology | ✓ |
| Separator | Ca/Ca VRLA |
| VDA Roll Over Test | AGM |
| Recommended Charge Rate | ✓ |
| Performance Marking | 4A |
| | W5-C2-V3-M3 |

Terminal Type

T1

Standard DIN Post




Positive Terminal

Negative Terminal

Cell Assembly Layout



Battery Hold-down

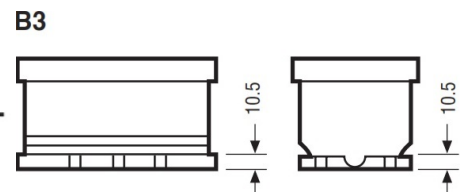

Data Sheet generated on 24/11/2023 - E&OE